


FUTURA slicer range gravity feed range

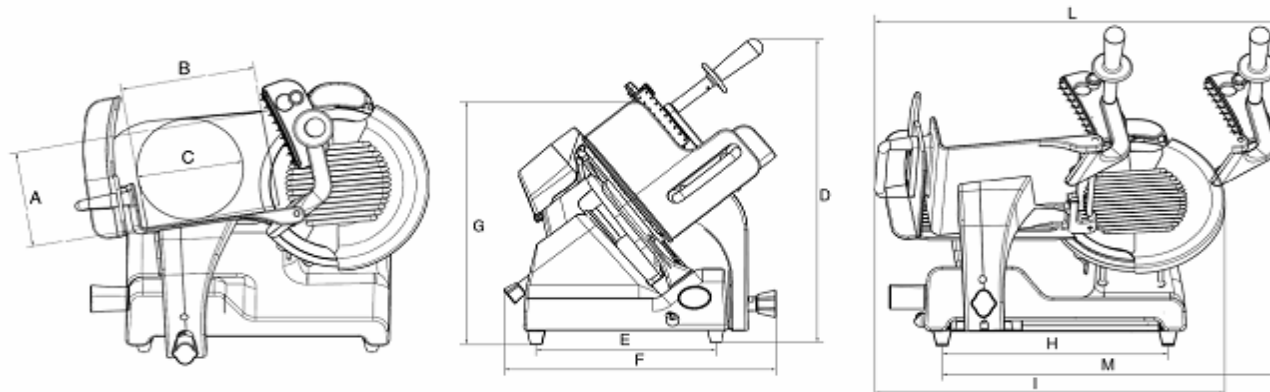
This range of gravity feed manual slicers are ideal for larger food service outlets, medium independent food stores, and large and small supermarket chains.

This straight feed range are articulating arm type machines.

The range includes three different slicing capacities; Medium (M), Large (L) and Extra Large (X) .

This range of machines is capable of very intensive work; they meet full CE regulations, and are constructed from anodised aluminium.

DESCRIPTION		
Model Range BSFGM (280mm) BSFGL (315mm) BSFGX (360mm)		
SPECIFICATIONS		
Finish This slicer is constructed from high finish anodised aluminium.		
Knife material Hard chromium steel 100Cr 6.		
Diameter of knife 280mm, 315mm, 360mm.		
		
Knife Sharpener	Product Capacity	Approvals
Integral double action sharpening and honing stones assembly.	Refer to specification matrix overleaf.	CE Conformity: EC machine directive 98/37/EEC.
Slice Thickness	Environment	EC EMC directive 89/336/EEC. EC low voltage directive 73/23/EEC.
Infinitely variable thickness between 0 and 17mm.	The machine should be cleaned at least once a day and the knife sharpened after cleaning. High-pressure water and steam cleaning should NOT be used.	
Product Sliced	Specials	Motor
Cooked meats, salami and cheese.		Belt driven. Power rating IP 32– refer to specification matrix. PC board IP 65 Noise level below 70 dbA Switch ON/OFF IP 65
Product Limitations		
The following products should not be sliced on the Futura slicer range: - Frozen goods (below -5°C) - Non food products - Products with bone.		

FUTURA slicer range gravity feed range
DIMENSIONS CHART

DIMENSIONS

Models	BSFGM	BSFGL	BSFGX
A	149 mm	185 mm	225 mm
B	260 mm	282 mm	318 mm
C	198 mm	230 mm	269 mm
D	418 mm	670 mm	690 mm
E	326 mm	377 mm	430 mm
F	466 mm	593 mm	630 mm
G	418 mm	510 mm	540 mm
H	413 mm	453 mm	534 mm
I	707 mm	714 mm	805 mm
L	762 mm	833 mm	926 mm
M	560 mm	698 mm	788 mm

SPECIFICATIONS

Models	BSFGM		BSFGL		BSFGX	
Capacity (round)	198 mm		230 mm		269 mm	
Capacity (rectangle)	260 x 149h mm		282 x 185h mm		318 x 225h mm	
Maximum slice thickness	17 mm		17 mm		17 mm	
Motor rating	0,18 kW	0,27 kW	0,24 kW	0,27 kW	0,55 kW	0,55 kW
Knife diameter	280 mm		315 mm		360 mm	
Electrical specifications	230V 50Hz 1 phase	400V 50Hz 3 phase	230V 50Hz 1 phase	400V 50Hz 3 phase	230V 50Hz 1 phase	400V 50Hz 3 phase
	Available also with: Voltage 110V; Frequency 60Hz					
Base dimensions	470 x 380 mm		524 x 427 mm		602 x 476 mm	
Net weight	29 Kg		35 Kg		41 Kg	

Options:

- Knife remover; when supplied with machine.
- Teflon coating
- Stainless steel presser with a different profile
- DC current feeding (12V-24V) on type BSFGL and BSFGX
- 0.5 Hp motor on slicer type BSFGL
- Product fence
- Extended plate (additional 110mm product depth)
- Receeding (front) feet kit

SHIPPING SPECIFICATIONS

Models	Crate Dimensions			Gross Weight
	Length	Width	Height	
BSFGM	750 mm	630 mm	600 mm	34 kg
BSFGL	870 mm	750 mm	670 mm	40 kg
BSFGX	900 mm	800 mm	670 mm	46 kg