


# Bratt Pans

N9E

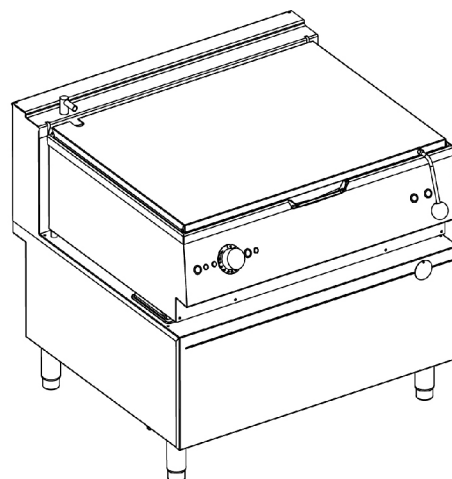

---

EN            Installation and operating manual \*



\*Original instructions

59589F001- 2018.01

## Foreword



The installation, use and maintenance manual (hereinafter Manual) provides the user with information necessary for correct and safe use of the machine (hereinafter "machine" or "appliance").

The following must not be considered a long and exacting list of warnings, but rather a set of instructions suitable for improving machine performance in every respect and, above all, preventing injury to persons and animals and damage to property due to improper operating procedures.

All persons involved in machine transport, installation, commissioning, use and maintenance, repair and disassembly must consult and carefully read this manual before carrying out the various operations, in order to avoid wrong and improper actions that could compromise the machine's integrity or endanger people. Make sure to periodically inform the user regarding the safety regulations. It is also important to instruct and update personnel authorised to operate on the machine, regarding its use and maintenance.

The manual must be available to operators and carefully kept in the place where the machine is used, so that it is always at hand for consultation in case of doubts or whenever required.

If, after reading this manual, there are still doubts regarding machine use, do not hesitate to contact the Manufacturer or the authorised Service Centre to receive prompt and precise assistance for better operation and maximum efficiency of the machine. During all stages of machine use, always respect the current regulations on safety, work hygiene and environmental protection. It is the user's responsibility to make sure the machine is started and operated only in optimum conditions of safety for people, animals and property.



### IMPORTANT

- The manufacturer declines any liability for operations carried out on the appliance without respecting the instructions given in this manual.
- The manufacturer reserves the right to modify the appliances presented in this publication without notice.
- No part of this manual may be reproduced.
- This manual is available in digital format by:
  - contacting the dealer or reference customer care;
  - downloading the latest and up to date manual on the web site: "[www.electrolux.com/professional](http://www.electrolux.com/professional)".
- The manual must always be kept in an easily accessed place near the machine. Machine operators and maintenance personnel must be able to easily find and consult it at any time.

# Contents

A	WARNING AND SAFETY INFORMATION .....	5
A.1	General information .....	5
A.2	Personal protection equipment .....	6
A.3	General safety .....	6
A.4	General safety rules .....	7
A.5	Safety signs to be placed near the machine area .....	9
A.6	Transport, handling and storage .....	10
A.7	Installation and assembly .....	10
A.8	Electrical connection .....	10
A.9	Water connection .....	11
A.10	Special installation .....	11
A.11	Machine space limits .....	11
A.12	Positioning .....	11
A.13	Reasonably foreseeable improper use .....	12
A.14	Machine cleaning and maintenance .....	13
A.15	Service .....	14
A.16	Machine disposal .....	14
B	TECHNICAL DATA .....	16
B.1	Dataplate position .....	16
B.2	Appliance and manufacturer's identification data .....	16
B.3	Gas/electrical appliance technical data .....	17
B.4	Gas/electrical appliance technical data - Australia .....	17
C	GENERAL INFORMATION .....	17
C.1	Australia .....	17
C.2	Introduction .....	17
C.3	Intended use and restrictions .....	18
C.4	Testing and inspection .....	18
C.5	Copyright .....	18
C.6	Keeping the manual .....	18
C.7	Recipients of the manual .....	18
C.8	Definitions .....	18
C.9	Responsibility .....	18
D	NORMAL USE .....	18
D.1	Characteristics of personnel trained for normal machine use .....	19
D.2	Characteristics of personnel enabled to operate on the machine .....	19
D.3	Operator qualified for normal machine use .....	19
E	INSTALLATION AND ASSEMBLY .....	19
E.1	Introduction .....	19
E.2	Customer's responsibilities .....	19
E.3	Disposal of packing .....	19
E.4	Joining Appliances .....	19
E.4.1	Installation on base, oven, bridge, cantilever frame or cement plinth .....	19
E.4.2	Sealing gaps between appliances .....	19
E.5	Gas, electricity and water connections (if present, depending on the appliance and/or model) .....	19
E.6	Connections .....	20
E.7	Gas connection .....	20
E.7.1	Introduction .....	20
E.7.2	Fume exhaust .....	20
E.7.3	Before connecting .....	20
E.7.4	Connection .....	20
E.7.5	Supply pressure check (all versions) .....	20
E.7.6	Gas pressure regulator .....	21
E.7.7	Primary air check .....	21
E.7.8	Conversion to another type of gas .....	21
E.7.9	Replacing the main burner nozzle .....	21
E.8	Before completing the installation operations .....	21
E.9	Electrical connection .....	21
E.9.1	Power cable .....	22
E.9.2	Equipotential node and Earth connection .....	22
E.9.3	Equipotential node and Earth connection .....	22
E.10	Water connection .....	22
E.10.1	Drain .....	22
E.11	Water connection .....	22
E.11.1	Drain .....	23
F	INSTRUCTION FOR THE USER .....	23
F.1	Braiser use .....	23
F.1.1	Water Filling .....	23
F.2	Gas models – Use .....	23
F.2.1	Switching ON .....	23
F.2.2	Switching OFF .....	23
F.3	Electric Models – Use .....	23
F.3.1	Switching On .....	24
F.3.2	Switching Off .....	24

F.3.3	Cooking (valid for gas and electric models)	24
F.3.4	Lifting the tank	24
G	MACHINE CLEANING AND MAINTENANCE	24
G.1	Ordinary maintenance	24
G.1.1	Informations for maintenance	24
G.1.2	Cleaning the appliance and accessories	24
G.1.3	External parts	24
G.1.4	Other surfaces	25
G.1.5	Internal parts (every year)	25
G.1.6	Idle periods	25
G.2	Extraordinary maintenance	25
G.2.1	Brief Troubleshooting guide	25
G.2.2	Instructions for replacing components	25
G.2.3	Maintenance intervals	26
G.2.4	Maintenance and schedule	26
G.2.5	Maintenance contacts (only for Australia)	27
H	MACHINE DISPOSAL	28
H.1	Waste storage	28
H.2	Procedure regarding appliance dismantling macro operations	28
I	ENCLOSED DOCUMENTS	28

---

## A WARNING AND SAFETY INFORMATION

---

### A.1 General information

To ensure safe use of the machine and a proper understanding of the manual it is necessary to be familiar with the terms and typographical conventions used in the documentation. The following symbols are used in the manual to indicate and identify the various types of hazards:



#### **WARNING**

Danger for the health and safety of operators.



#### **WARNING**

Danger of electrocution - dangerous voltage.



#### **CAUTION**

Risk of damage to the machine or the product.



#### **IMPORTANT**

Important instructions or information on the product



Read the instructions before using the appliance








Clarifications and explanations

- Only specialised personnel are authorised to operate on the machine.
- This appliance must not be used by minors and adults with limited physical, sensory or mental abilities or without adequate experience and knowledge regarding its use.
  - Do not let children play with the appliance.
  - Keep all packaging and detergents away from children.
  - Cleaning and user maintenance shall not be made by children without supervision.
- Do not store explosive substances, such as pressurized containers with flammable propellant, in this appliance or close to the appliance
- Do not remove, tamper with or make the machine “CE” marking illegible.
- Refer to the data given on the machine’s data plate “CE” marking for relations with the Manufacturer (e.g. when ordering spare parts, etc.).
- When scrapping the machine, the “CE” marking must be destroyed.

## A.2 Personal protection equipment

Summary table of the Personal Protection Equipment (PPE) to be used during the various stages of the machine's service life.

Stage	Protective garments 	Safety footwear 	Gloves 	Glasses 	Safety helmet 
Transport	—	●	○	—	○
Handling	—	●	○	—	—
Unpacking	—	●	○	—	—
Installation	—	●	○	—	—
Normal use	●	●	● <sup>1</sup>	—	—
Adjustments	○	●	—	—	—
Routine cleaning	○	●	○	○	—
Extraordinary cleaning	○	●	○	○	—
Maintenance	○	●	○	—	—
Dismantling	○	●	○	○	—
Scrapping	○	●	○	○	—
<b>Key:</b>					
●	PPE REQUIRED				
○	PPE AVAILABLE OR TO BE USED IF NECESSARY				
—	PPE NOT REQUIRED				

1. During Normal use, gloves must be heatproof to protect hands from contact with hot food or hot parts of the appliance and/or when removing hot items from it. Failure to use the personal protection equipment by operators, specialised personnel or users can involve exposure to chemical risk and possible damage to health (depending on the model).

## A.3 General safety

- The machines are provided with electric and/or mechanical safety devices for protecting workers and the machine itself. Therefore the user must not remove or tamper with such devices. The Manufacturer declines any liability for damage due to tampering or their non-use.
- Never operate the machine, removing, modifying or tampering with the guards, protection or safety devices.
- Do not make any modifications to the parts supplied with the appliance.
- Several illustrations in the manual show the machine, or parts of it, without guards or with guards removed. This is purely for explanatory purposes. Do not use the machine without the guards or with the protection devices deactivated.
- Do not remove, tamper with or make illegible the safety, danger and instruction signs and labels on the machine.
- Air recirculation must take into account the air necessary for combustion, 2 m<sup>3</sup>/h/kW of gas power, and also the "well-being" of persons working in the kitchen.
- Inadequate ventilation causes asphyxia. Do not obstruct the ventilation system in the place where this appliance is installed. Do not obstruct the vents or ducts of this or other appliances.

- Place emergency telephone numbers in a visible position.
- The measured sound level emitted “A” does not exceed 70 dB (“A”).
- Turn the appliance off in case of fault or poor operation.
- Do not use products (even if diluted) containing chlorine (sodium hypochlorite, hydrochloric or muriatic acid, etc.) to clean the appliance or the floor under it.
- Do not use metal tools to clean steel parts (wire brushes or Scotch Brite type scouring pads).
- Do not allow oil or grease to come into contact with plastic parts. Do not allow dirt, fat, food or other residuals to form deposits on the appliance.
- Do not spray water or use steam to clean the equipment.
- Do not store or use gasoline or other flammable vapours, liquids or items in the vicinity of this or any other appliance.
- Do not spray aerosols in the vicinity of this appliance while it is in operation.
- Never check for leaks with an open flame.

## **A.4 General safety rules**

### **Instructions for use and maintenance**

- Risks mainly of a mechanical, thermal and electrical nature exist in the machine. Where possible the risks have been neutralised:
  - directly, by means of adequate design solutions.
  - indirectly by using guards, protection and safety devices.
- During maintenance several risks remain, as these could not be eliminated, and must be neutralised by adopting specific measures and precautions.
- Do not carry out any checking, cleaning, repair or maintenance operations on moving parts. Workers must be informed of this prohibition by means of clearly visible signs.
- To guarantee machine efficiency and correct operation, periodical maintenance must be carried out according to the instructions given in this manual.
- Make sure to periodically check correct operation of all the safety devices and the insulation of electrical cables, which must be replaced if damaged.
- Extraordinary machine maintenance operations must only be carried out by specialized Technicians provided with all the appropriate personal protection equipment (safety shoes, gloves, glasses, overalls, etc.), tools, utensils and ancillary means.
- Never operate the machine, removing, modifying or tampering with the guards, protection or safety devices.

- Before carrying out any operation on the machine, always consult the manual which gives the correct procedures and contains important information on safety.

## Residual risks

- The machine has several risks that were not completely eliminated from a design standpoint or with the installation of adequate protection devices. Nevertheless, through this manual the Manufacturer has taken steps to inform operators of such risks, carefully indicating the personal protection equipment to be used by them. In order to reduce the risks, provide for sufficient spaces while installing the unit.

To preserve these conditions, the areas around the machine must always be:

- kept free of obstacles (e.g. ladders, tools, containers, boxes, etc.);
- clean and dry;
- well lit.

For the Customer's complete information, the residual risks remaining on the machine are indicated below: such situations are deemed improper and therefore strictly forbidden.

Residual risk	Description of hazardous situation
Slipping or falling	The operator can slip due to water or dirt on the floor
Burns/abrasions (e.g. heating elements)	The operator deliberately or unintentionally touches some components inside the machine without using protective gloves
Electrocution	Contact with live parts during maintenance operations carried out with the electrical panel powered
Sudden closing of the lid/door/oven door (if present, depending on the appliance type)	The operator for normal machine use could suddenly and deliberately close the lid/door/oven door (if present, depending on the appliance type)
Tipping of loads	When handling the machine or the packing containing it, using unsuitable lifting systems or accessories or with the unbalanced load







## Mechanical safety characteristics, hazards




- The appliance does not have sharp edges or protruding parts. The guards for the moving and live parts are fixed to the cabinet with screws, to prevent accidental access.

## Protection devices installed on the machine

- The guards on the machine are:
  - fixed guards (e.g. casings, covers, side panels, etc.), fixed to the machine and/or frame with screws or quick-release connectors that can only be removed or opened with tools;

### A.5 Safety signs to be placed near the machine area

Prohibition	Meaning
	do not remove the safety devices
	do not use water to extinguish fires (placed on electrical parts)
	Keep the area around the appliance clear and free from combustible materials. Do not keep flammable materials in the vicinity of the appliance
	Install the appliance in a well-ventilated place to avoid the creation of dangerous mixtures of unburnt gases in the same room

Danger	Meaning
	danger of burns
	danger of electrocution (shown on electrical parts with indication of voltage)
	danger of crushing

## End of use

- When the appliance is no longer to be used, make it unusable by removing the mains power supply wiring.

## **A.6 Transport, handling and storage**

- Due to their size, the machines can be stacked on top of each other during transport, handling and storage by complying with that specified on the slip placed on the packing.
- Do not stand under suspended loads during loading/unloading operations. Unauthorised personnel must not enter the work area.
- The weight of the appliance alone is not sufficient to keep it steady.
- For machine lifting and anchoring, do not use movable or weak parts such as: casing, electrical raceways, pneumatic parts, etc.
- Do not push or pull the appliance to move it, as it may tip over.
- Machine transport, handling and storage personnel must be adequately instructed and trained regarding the use of lifting systems and personal protection equipment suitable for the type of operation carried out (e.g. overalls, safety shoes, gloves and helmet).
- When removing the anchoring systems, make sure the stability of the machine parts does not depend on the anchoring and, therefore, that this operation does not cause the load to fall off the vehicle. Before unloading the machine components, make sure all the anchoring systems are removed.
- Machine positioning, installation and disassembly must be carried out by specialised personnel.

## **A.7 Installation and assembly**

- The operations described must be carried out by personnel qualified (refer to D.1 *Characteristics of personnel trained for normal machine use*) in compliance with the current safety regulations, regarding the equipment used and the operating procedures.
- The plug, if present, must be accessible after positioning the appliance in the place of installation.
- Disconnect the appliance from the power supply before carrying out any installation procedure.

## **A.8 Electrical connection**

Before connecting, make sure the mains voltage and frequency match those indicated on the appliance data plate.

- Work on the electrical systems must only be carried out by specialised personnel.
- Connection to the power supply must be carried out in compliance with the regulations and provisions in force in the country of use.

- If the power cable is damaged, it must be replaced by the Customer Care Service or in any case by specialised personnel, in order to prevent any risk.
- Verify that a safety circuit breaker is installed between the power cable of the appliance and the mains electric line. The contact opening max. distance and leakage current must comply with the local safety regulations.

## **A.9 Water connection**

**(depending on the appliance and/or model)**

**The appliance must be connected to the water system in compliance with the current national regulations (and EN1717 for Italy).**

- The appliance must be supplied with drinking water at a pressure of 1.5 – 3bar.



### **WARNING**

The manufacturer declines any liability if the **safety regulations** are not respected.

## **A.10 Special installation**

This appliance is not suitable for a marine environment.

## **A.11 Machine space limits**

- A suitable space must be left around the appliance (for operations, maintenance, etc.).
- The passages enabling personnel to operate on the appliance must be at least 200 mm wide.
- This space must be increased in case of use and/or transfer of other equipment and/or means or if exit routes are necessary inside the workplace.

## **A.12 Positioning**

- Install the appliance, taking all the safety precautions required for this type of operation, also respecting the relevant fire-prevention measures.
- Handle the appliance with care in order to avoid damage or danger to people. Use a pallet for handling and positioning.
- The installation diagram gives the appliance overall dimensions and the position of connections (gas, electricity, water). Check that they are available and ready for making all the necessary connections.
- Prevent the areas where the machine is installed to be polluted with corrosive substances (chlorine, etc.). In case such prevention cannot

be guaranteed, the entire stainless steel surface has to be coated by a paraffin protective film spread by using a rag soaked with paraffin. The manufacturer declines any liability for corrosive effects due to external causes.

- The appliance can be installed separately or combined only with other appliances of the same range.
- The appliances are not suitable for recess-mounting. Leave a space of at least 10 mm between the appliance and side walls and 10 mm from the rear wall, or in any case an adequate space to enable subsequent servicing or maintenance operations.
- Suitably insulate surfaces that are at distances less than that indicated.
- Maintain a distance of at least 10 mm between the appliance and any combustible walls. Do not store or use flammable materials and liquids near the appliance.
- Check and, if necessary, level the appliance after positioning. Incorrect levelling can cause appliance malfunctioning.
- Wear protective gloves and unpack the machine, carrying out the following operations:
  - cut the straps and remove the protective film, taking care not to scratch the surface if scissors or blades are used;
  - remove the cardboard top, the polystyrene corners and the vertical protection pieces;
  - for appliances with stainless steel cabinet, remove the protective film very slowly without tearing it, to avoid leaving glue stuck to the surface;
  - should this happen, remove the traces of glue with a non-corrosive solvent, rinsing it off and drying thoroughly;
  - go over all stainless steel surfaces vigorously with a cloth moistened with paraffin oil in order to create a protective film.
- In case of permanent connection: the device lockable in the open position must be accessible even after the appliance is installed in its place.

### **A.13 Reasonably foreseeable improper use**

Improper use is any use different from that specified in this manual. During machine operation, other types of work or activities deemed improper and that in general can involve risks for the safety of operators and damage to the appliance are not allowed. Reasonably foreseeable improper use includes:

- lack of machine maintenance, cleaning and periodical checks;
- structural changes or modifications to the operating logic;

- tampering with the guards or safety devices;
- failure to use personal protection equipment by operators, specialised personnel and maintenance personnel;
- failure to use suitable accessories (e.g. use of unsuitable equipment or ladders);
- keeping combustible or flammable materials, or in any case materials not compatible with or pertinent to the work, near the machine;
- wrong machine installation;
- placing in the machine any objects or things not compatible with its use, or that can damage the machine, cause injury or pollute the environment;
- climbing on the machine;
- non-compliance with the requirements for correct machine use;
- other actions that give rise to risks not eliminable by the Manufacturer.
- The previously described actions are prohibited!

### **Normal use**

- In case of a significant anomaly (e.g. short circuits, wires coming out of the terminal block, motor breakdowns, worn electrical cable sheathing, smell of gas indicating possible leakage, etc.) the operator for normal machine use must:
  - immediately deactivate the machine and disconnect all the supplies (electricity, gas, water)

### **A.14 Machine cleaning and maintenance**

- Before carrying out any cleaning or maintenance, disconnect the appliance from the power supply and carefully unplug it (if present).
- During maintenance, the cable and plug must be kept in a visible position by the operator carrying out the work.
- Do not touch the appliance with wet hands or feet or when barefoot.
- Do not remove the safety guards.
- Use a ladder with suitable protection for work on appliances with high accessibility (depending on the appliance type).
- Use suitable personal protection equipment (protective gloves). Refer to “A.2 *Personal protection equipment*” for suitable personal protection equipment.

### **Ordinary maintenance**

- Disconnect the power supply before cleaning the appliance.
- Do not clean the machine with jets of water.

## **Precaution in case of long periods**

- Machine maintenance, checking and overhaul operations must only be carried out by specialised personnel or the Customer Care Service, provided with adequate personal protection equipment (safety shoes and gloves), tools and ancillary means.
- Work on the electrical equipment must only be carried out by a specialised electrician or the Customer Care Service
- Put the machine in safe conditions before starting any maintenance operation.
- Respect the requirements for the various routine and extraordinary maintenance operations. Non-compliance with the instructions can create risks for personnel.

## **Preventive Maintenance**

- Preventive Maintenance reduces downtime and maximizes machines efficiency. Customer Care Service can provide advice on the best maintenance plan to be purchased based on the intensity of use and the age of the equipment.

## **Repair and extraordinary maintenance**

- Repair and extraordinary Maintenance have to be carried out by specialised authorised personnel. The manufacturer declines any liability for any failure or damage caused by the intervention of an unauthorized technician and the original manufacturer warranty will be invalidated.

## **Parts and accessories**

- Use only original accessories and/or spare parts. Failure to use original accessories and/or spare parts will invalidate the original manufacturer warranty and may render the machine not compliant with the safety standard.

## **A.15 Service**

- Only original spare parts can ensure the safety standards of the appliance.
- Only repairs undertaken by an Electrolux approved service technician are covered by the warranty.

## **A.16 Machine disposal**

- Dismantling operations must be carried out by specialised personnel.
- Work on the electrical equipment must only be carried out by specialised personnel, with the power supply disconnected.

- Make the appliance unusable by removing the power cable and any compartment closing devices, to prevent the possibility of someone becoming trapped inside.





AB	gas safety certificate number
N	certification group
0051	notified body
EN 203-1	EU standard
L	logo IMQ/GS
Cat	gas category
Pmbar	gas pressure
Electrolux Professional SpA Viale Treviso 15 33170 Porde- none Italy	
manufacturer	

### B.3 Gas/electrical appliance technical data

Technical data		MODELS					
		+9BRGHMOF0 +9BRGHMOFM +9BRGHDOF0 +9BRGHDOFM +9BRGHDOFW 800mm	+9BRGJMPF0 +9BRGJMPPFM +9BRGJDPF0 +9BRGJDPPFM 1000mm	E9BRGHMO40 E9BRGHMO4M E9BRGHDO40 E9BRGHDO4M 800mm	E9BRGJMP40 E9BRGJMP4M E9BRGJDP40 E9BRGJDP4M 1000mm	+9BREHMOF0 +9BREHMOFM +9BREHDOF0 +9BREHDOFM 800mm	+9BREJMPF0 +9BREJMPPFM +9BREJDPF0 +9BREJDPPFM 1000mm
Braiser capacity	Lt	80	100	80	100	80	100
Power supply voltage	V	220-230	220-230	220-230	220-230	380-400	380-400
Electrical power absorbed	kW	0,1	0,1	0,1	0,1	-	-
Frequency	Hz	50	50	60	60	50/60	50/60
Phases	Nr	1+N	1+N	1+N	1+N	3+N	3+N
Power cable section <sup>1</sup>	mm <sup>2</sup>	1	1	1	1	2.5	4
Connection ISO 7/1 - BS/P connection	∅	1/2"	1/2"	1/2"	1/2"	—	—
Nominal heat output	kW	21	27	21	27	11.7-13	15.3-17

1. Minimum recommended.

### B.4 Gas/electrical appliance technical data - Australia

Technical data		MODELS	
		+9BRGHMOFA +9BRGHMOFB +9BRGHDOFA +9BRGHDOFB 800mm	+9BRGJMPFA +9BRGJMPPFA +9BRGJDPFA +9BRGJDPPFA 1000mm
Braiser capacity	Lt	80	100
Power supply voltage	V	240	240
Electrical power absorbed	kW	0,25	0,25
Frequency	Hz	50/60	50/60
Phases	Nr	1+N	1+N
Power cable section <sup>1</sup>	mm <sup>2</sup>	1	1
Connection ISO 7/1 - BS/P connection	∅	1/2"	1/2"
Nominal heat output	MJ/h	79 <sup>2</sup> 83	101

1. Minimum recommended.

2. = for Natural Gas

## C GENERAL INFORMATION



### WARNING

Refer to "WARNING and Safety Information"

electrical wiring regulations, local water supply regulations, AS5601-gas installation, health authorities and any other statutory regulations.

### C.2 Introduction

Given below is some information regarding the intended use of this appliance, its testing, and a description of the symbols used (that identifies the type of warning), the definitions of

### C.1 Australia

This appliance shall be installed only by authorised persons and in accordance with the manufacturer's installation instructions, local gas fitting regulations, municipal building codes,

terms used in the manual and useful information for the appliance user.

### C.3 Intended use and restrictions

This appliance is designed for cooking food. It is intended for commercial use.

**This appliance must not be used by minors and/or adults with limited physical, sensory or mental abilities or without adequate experience and knowledge regarding its use.**

Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.



#### CAUTION

The machine is not suitable for installation outdoors and/or in places exposed to atmospheric agents (rain, direct sunlight, etc.).

### C.4 Testing and inspection

Our appliances have been designed and optimized, with laboratory testing, in order to obtain high performance and efficiency.

Passing of the tests (visual inspection - gas/electrical test - functional test) is guaranteed and certified by the specific enclosures.

### C.5 Copyright

This manual is intended solely for consultation by the operator and can only be given to third parties with the permission of Electrolux Professional SpA.

### C.6 Keeping the manual

The manual must be carefully kept for the entire life of the machine, until scrapping. The manual must stay with the machine in case of transfer, sale, hire, granting of use or leasing.

### C.7 Recipients of the manual

**This manual is intended for:**

- the carrier and handling personnel;
- installation and commissioning personnel;
- the employer of machine users and the workplace manager;
- operators for normal machine use;
- specialised personnel - Customer Care service (see service manual).

### C.8 Definitions

Listed below are the definitions of the main terms used in the manual. It is advisable to read them carefully before use.

Operator	machine installation, adjustment, use, maintenance, cleaning, repair and transport personnel.
Manufacturer	Electrolux Professional SpA or any other service centre authorised by Electrolux Professional SpA.
Operator for normal machine use	an operator who has been informed and trained regarding the tasks and hazards involved in normal machine use.

Customer Care service or specialised personnel	an operator instructed/trained by the Manufacturer and who, based on his professional and specific training, experience and knowledge of the accident-prevention regulations, is able to appraise the operations to be carried out on the machine and recognise and prevent any risks. His professionalism covers the mechanical, electrotechnical and electronics fields etc.
Danger	source of possible injury or harm to health.
Hazardous situation	any situation where an operator is exposed to one or more hazards.
Risk	a combination of probabilities and risks of injury or harm to health in a hazardous situation.
Protection devices	safety measures consisting of the use of specific technical means (guards and safety devices) for protecting operators against risks.
Guard	an element of a machine used in a specific way to provide protection by means of a physical barrier.
Safety device	a device (other than a guard) that eliminates or reduces the risk; it can be used alone or in combination with a guard.
Customer	the person who purchased the machine and/or who manages and uses it (e.g. company, entrepreneur, firm).
Electrocution	an accidental discharge of electric current on a human body.

### C.9 Responsibility

**The Manufacturer declines any liability for damage and malfunctioning caused by:**

- non-compliance with the instructions contained in this manual;
- repairs not carried out in a workmanlike fashion, and replacements with parts different from those specified in the spare parts catalogue (the fitting and use of non-original spare parts and accessories can negatively affect machine operation and invalidates the original manufacturer warranty);
- operations carried out by non-specialised personnel;
- unauthorized modifications or operations;
- missing, lack or inadequate maintenance;
- improper machine use;
- unforeseeable extraordinary events;
- use of the machine by uninformed and untrained personnel;
- non-application of the current provisions in the country of use, concerning safety, hygiene and health in the workplace.

The Manufacturer declines any liability for damage caused by arbitrary modifications and conversions carried out by the user or the Customer.

The employer, workplace manager or service technician are responsible for identifying and choosing adequate and suitable personal protection equipment to be worn by operators, in compliance with regulations in force in the country of use.

Electrolux Professional SpA declines any liability for inaccuracies contained in the manual, if due to printing or translation errors.

Any supplements to the installation, use and maintenance manual the Customer receives from the Manufacturer will form an integral part of the manual and therefore must be kept together with it.

## D NORMAL USE



### WARNING

Refer to “*WARNING and Safety Information*”

### D.1 Characteristics of personnel trained for normal machine use

The Customer must make sure the personnel for normal machine use are adequately trained and skilled in their duties, as well as ensuring their own safety and that of other persons. The Customer must make sure his personnel have understood the instructions received and in particular those regarding work hygiene and safety in use of the machine.

### D.2 Characteristics of personnel enabled to operate on the machine

The Customer is responsible for ensuring that persons assigned to the various duties:

- read and understand the manual;
- receive adequate training and instruction for their duties in order to perform them safely;
- receive specific training for correct machine use.

### D.3 Operator qualified for normal machine use

Must have at least:

- knowledge of the technology and specific experience in operating the machine;
- adequate general basic education and technical knowledge for reading and understanding the contents of the manual, including correct interpretation of the drawings, signs and pictograms;
- sufficient technical knowledge for safely performing his duties as specified in the manual;
- knowledge of the regulations on work hygiene and safety.

In case of a significant anomaly (e.g. short circuits, wires coming out of the terminal block, motor breakdowns, worn electrical cable sheathing, etc.) the operator for normal machine use must:

- immediately deactivate the machine and disconnect all the supplies (electricity, gas, water).

## E INSTALLATION AND ASSEMBLY



### WARNING

Refer to “*WARNING and Safety Information*”

### E.1 Introduction

To ensure correct operation of the appliance and maintain safe conditions during use, carefully follow the instructions given below in this section.



### CAUTION

Before moving the appliance make sure the load bearing capacity of the lifting equipment used is suitable for its weight.

### E.2 Customer's responsibilities

The tasks and works required of the Customer are:

- prearrange a high-sensitivity manual-reset magneto-thermal circuit-breaker;
- prearrange a device lockable in the open position for the connection to the power supply.
- check the floor planarity on which the machine is placed.
- install a rapid gas shutoff valve ahead of each individual appliance (depending on the model). Install the valve in an easily accessed place.
- for information regarding the electrical connection, refer to E.9 *Electrical connection* paragraph;

### E.3 Disposal of packing

The packing must be disposed of in compliance with the current regulations in the country where the appliance is used. All the packing materials are environmentally friendly.

They can be safely kept, recycled or burned in an appropriate waste incineration plant. Recyclable plastic parts are marked as follows:



#### Polyethylene

- Outer wrapping
- Instructions bag



#### Polypropylene

- Straps




#### Polystyrene foam

- Corner protectors

### E.4 Joining Appliances

- Bring the appliances together and level them by turning the feet until the tops match (detail “1F”);
- From the rear of the appliances, insert the coupling plate (provided) in the side slots on the back panels;
- Secure the plate with two flat head M5 screws provided (detail “1D”).

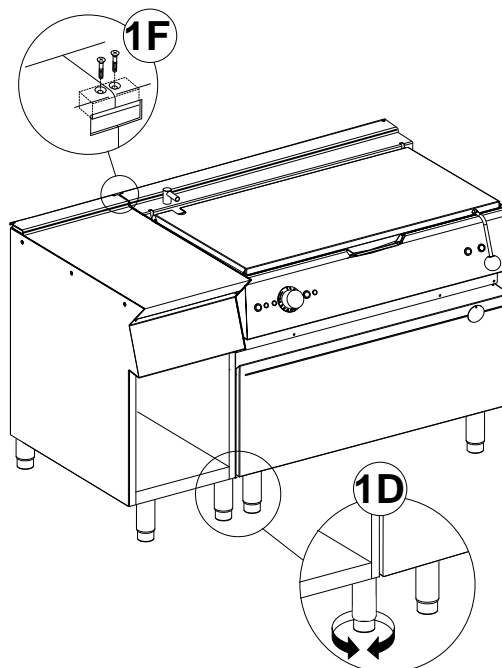

#### E.4.1 Installation on base, oven, bridge, cantilever frame or cement plinth

Carefully follow the instructions enclosed with the corresponding accessory.

#### E.4.2 Sealing gaps between appliances

Follow the instructions supplied with the optional sealing paste pack.

#### E.5 Gas, electricity and water connections (if present, depending on the appliance and/or model)


- Any installation work or maintenance to the supply system (gas, electricity and/or water, if present) must only be carried out by the utility company or an authorised installation technician.

- Refer to the appliance dataplate for the product code.
- See the installation diagram for the type and position of appliance connections.

## E.6 Connections

Refer to the appliance dataplate for the product code. See the installation diagrams for the position of connections on the appliance:

- G: Gas (ø 1/2" Uni En 10226-1)
- EI: Electricity
- CWI: Cold Water Supply
- HWI: Hot Water Supply (If Present)

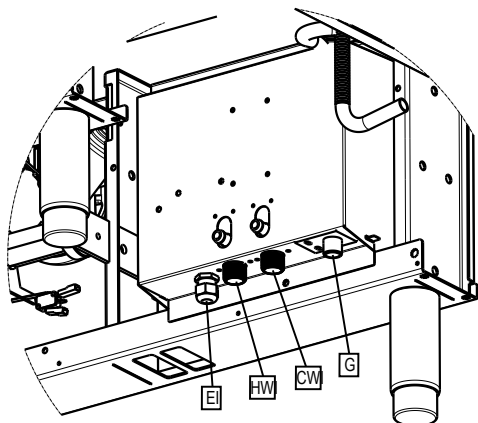

## E.7 Gas connection

### E.7.1 Introduction



#### CAUTION

This appliance is arranged and tested to operate with G20 gas 20 mbar (for AUSTRALIA: Natural gas 1.0 kPa or propane 2.65 kPa); to convert it to another type of gas, follow the instructions in E.7.8 *Conversion to another type of gas* paragraph of this section.)

### E.7.2 Fume exhaust

For **AUSTRALIA** ventilation must be in accordance with Australian building codes and kitchen exhaust hoods must comply with AS/NZS1668.1 and AS 1668.2.


#### E.7.2.1 Type "A1" appliances

Position type "A1" appliances under an extraction hood to ensure removal of fumes and steam produced by cooking (**not relevant for Australian standard**).

### E.7.3 Before connecting

- Make sure the appliance is arranged for the type of gas to be used.
- Fit a rapid gas shutoff tap/valve ahead of each appliance.

- Install the tap/valve in an easily accessed place.

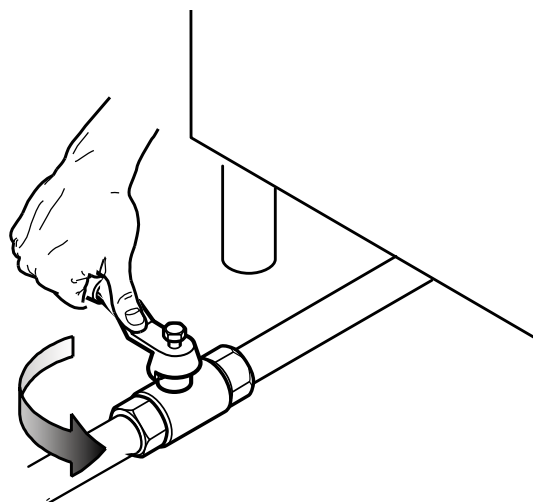

- Clean the pipes to remove any dust, dirt or foreign matter which could block the supply.
- The gas supply line must ensure the gas flow necessary for full operation of all the appliances connected to the system. A supply line with insufficient flow will affect correct operation of the appliances connected to it.



#### IMPORTANT

Incorrect levelling of the appliance can affect combustion and cause malfunctioning.

### E.7.4 Connection


- Before connecting the appliance to the gas supply, remove the plastic protection cover from the gas connection on the appliance.
- The appliance is arranged for connection on the bottom right side; countertop models can be connected to the gas supply using the rear connection, after unscrewing the metal closing plug and screwing it tightly onto the front connection.
- After installation, use soapy water to check connections for leaks.
- For Australia only: The gas connection is male 1/2" BSP.

### E.7.5 Supply pressure check (all versions)

Make sure the appliance is suitable for the type of gas available, according to that given on the dataplate (otherwise, follow the instructions given in E.7.8 *Conversion to another type of gas* paragraph of this section).

The supply pressure must be measured with the appliance operating, using a pressure gauge (min. 0.1 mbar).


- Remove the bottom panel.
- Loosen the pressure point screw "N" and connect the pressure gauge "O".
- Compare the value read on the pressure gauge with that given in Table "B" (see Appendix).
- If the pressure gauge gives a reading outside the range of values in Table "B" (see Appendix), do not switch the appliance on. Consult the gas company.



### E.7.6 Gas pressure regulator

The section of the gas supply line must be sufficient to ensure the gas flow necessary for full operation of all the appliances connected to the system.

If the gas pressure is higher than that specified or is difficult to regulate (not stable), install a gas pressure regulator (accessory code 927225) in an easily accessed position ahead of the appliance. The pressure regulator should preferably be fitted horizontally, to ensure the right outlet pressure:

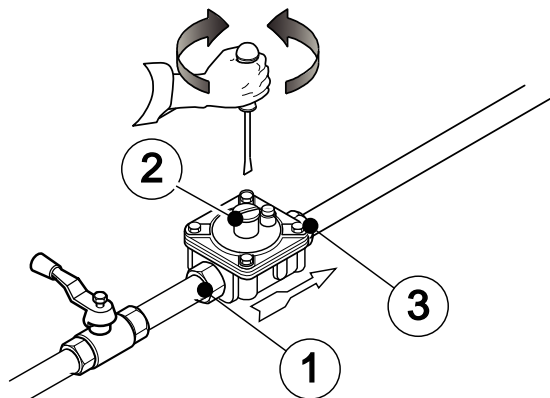

1	connection side gas from mains
2	pressure regulator
3	connection side gas towards the appliance
	The arrow on the regulator indicates the gas flow direction.




#### CAUTION

These models are designed and certified for use with natural or propane gas. For natural gas, the pressure regulator on the header is set to 8" w.c. (20 mbar).

### E.7.7 Primary air check

The primary air is correctly adjusted when the flame does not float with the burner cold and there is no flareback with the burner hot.

- Undo screw "A" and position aerator "E" at distance "H" given in Table "B"; retighten screw "A" and seal with paint.

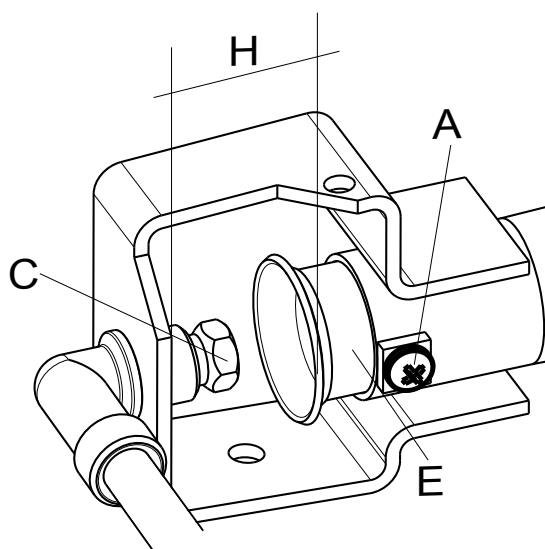

### E.7.8 Conversion to another type of gas

Nozzle Table "B" (see Appendix) gives the type of nozzles to be used when replacing those installed by the manufacturer (the number is stamped on the nozzle body).

At the end of the procedure, carry out the following check-list:

Check	Ok
burner nozzle/s replacement	
correct adjustment of primary air supply to burner/s	
pilot nozzle/s replacement	
minimum flame screw/s replacement	
correct adjustment pilot/s if necessary	
correct adjustment of supply pressure (see technical data/gas nozzles table)	
apply sticker (supplied) with data of new gas type used	

### E.7.9 Replacing the main burner nozzle

(see previous picture)

- Lift the tank.
- Unscrew the nozzle "C" and replace it with one suitable for the type of gas according to the indications of the table "B" (see Appendix).
- The nozzle diameter is given in hundredths of mm on the nozzle body.
- Retighten nozzle "C"

### E.8 Before completing the installation operations

- Use soapy water to check all gas connections for leaks.
- DO NOT use a naked flame to check for gas leaks.
- Light all the burners separately and also together, to check correct operation of the gas valves, rings and lighting.
- For each burner, adjust the flame regulator to the lowest setting, individually and together.
- After completing the operations, the installer must instruct the user on the correct method of use.

If the appliance does not work properly after carrying out all the checks, contact the local Customer Care service centre.

### E.9 Electrical connection



#### WARNING

Work on the electrical systems must only be carried out by specialised personnel.

Before connecting, make sure that:

- the mains voltage and frequency match those indicated on the appliance data plate.
  - the power supply must be carried out in compliance with the regulations and provisions in force in the country of use (refer to E.9.1 *Power cable*).
  - a differential thermal-magnetic switch suitable for the input specified on the dataplate, with contact gap enabling complete disconnection in category III overvoltage conditions and complying with the regulations in force, is installed between the power cable and the electric line.
- For the correct size of the switch, refer to the absorbed current specified on the appliance dataplate.




#### IMPORTANT


The manufacturer declines any liability if the safety regulations are not respected.

- Undo and remove the fixing screws "A";

2. Remove the front panel of the appliance to access terminal block;

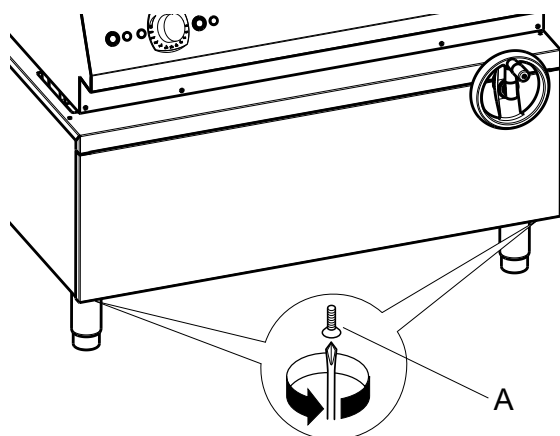

3. Connect the power cable to the terminal block "M" as shown in the picture below and in the wiring diagram attached to the appliance;

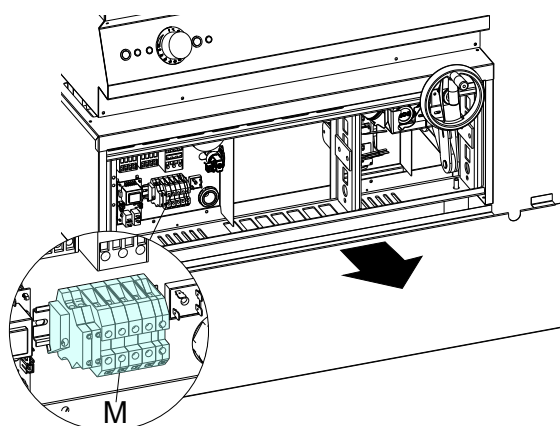

4. Secure the power cable with the cable clamp;
5. After making the connection, with the machine working check that the power supply does not fluctuate by  $\pm 10\%$  the rated voltage;
6. Installation requires the inclusion of a device lockable in the "open" position during maintenance.

#### E.9.1 Power cable

Unless otherwise specified, our appliances are not equipped with a power cable. The installer must use a flexible cable having characteristics not lower than the H07RN-F rubber insulated type.

Protect the section of cable outside the appliance with a metal or rigid plastic tube.



### WARNING

If the power cable is damaged, it must be replaced by the after-sales service or in any case by specialised personnel, in order to prevent any risk.



### WARNING

The manufacturer declines any liability for damage or injury resulting from breach of the above rules or non-compliance with the electrical safety regulations in force in the country where the machine is used.

#### E.9.2 Equipotential node and Earth connection

- Connect the appliance to an earth;  
It must be included in an equipotential node by means of the screw located under the appliance frame at the back right hand side.

The screw is marked with the symbol  $\nabla$ .

#### E.9.3 Equipotential node and Earth connection

Connect the appliance to an earth; it must be included in an equipotential node by means of the screw located at the front right under the frame.

The screw is marked with the symbol  $\nabla$ .

#### E.10 Water connection



#### CAUTION

The appliance must be connected to the water system in compliance with the current national regulations (and EN1717 per l'Italia).

The appliance must be supplied with drinking water at a pressure of 1.5 – 3bar.



#### IMPORTANT

If the water pressure is higher than that specified, use a pressure reducer to avoid damaging the appliance.

For correct installation, the water inlet pipe must be connected to the mains using a mechanical filter and a shutoff valve. Before connecting the filter, allow a certain amount of water to run in order to clear the pipe of any waste matter.

#### E.10.1 Drain

The discharge water must be removed by means of a suitable receptacle resistant to a temperature of at least 100°C. The steam produced during the discharge stages must not come into contact with the appliance.

#### E.11 Water connection



#### CAUTION

The appliance must be connected to the water system in compliance with the current national regulations (and EN1717 per l'Italia).

The appliance must be supplied with drinking water at a pressure of 1.5 – 3bar.



#### IMPORTANT

If the water pressure is higher than that specified, use a pressure reducer to avoid damaging the appliance.

For correct installation, the water inlet pipe must be connected to the mains using a mechanical filter and a shutoff valve. Before connecting the filter, allow a certain amount of water to run in order to clear the pipe of any waste matter.

### E.11.1 Drain

The discharge water must be removed by means of a suitable receptacle resistant to a temperature of at least 100°C. The

steam produced during the discharge stages must not come into contact with the appliance.

## F INSTRUCTION FOR THE USER

### F.1 Braiser use

#### General precautions

- The appliance is intended for industrial use by trained personnel.
- This appliance must only be used for its expressly designed purpose; i.e. for cooking or preparing meats with sauce, braised and stewed, sauces, light fries, omelettes and stewing or dry cooking in general. Any other use is deemed improper.
- Do not use the appliance as a frier; the temperature of the tank bottom exceeds 230°C with risk of the oil burning.
- It is advisable not to use appliances with iron bottom for cooking tomato sauces and foods with "acid" content.

#### Appliances with iron bottom:

Before first use, it is advisable to clean the tank and prepare it for cooking, as follows:

- Boil water, vegetables and salt, setting the braiser to maximum;
- Boil off the water and clean any still moist vegetables from the bottom of the braiser using a cloth;
- Spread a layer of oil (2mm) in the tank and heat at minimum until drying it;
- Clean the braiser thoroughly, drying it.

#### Dumat steel bottom appliances:

Before use, carefully clean any industrial greases from the tank, proceeding as follows:

- fill the tank with water and normal detergent and bring to boil for a few minutes.
- empty and rinse thoroughly with clean water.




#### CAUTION

Preheating dry with the lid lowered could cause intervention of the limiter.

#### F.1.1 Water Filling


- Turn on the automatic switch installed ahead of the appliance and open the water tap;
- Open the braiser lid;
- Keep button "A" (cold water) / "B" (hot water, if present), pressed to fill the braiser tank with water;
- The water will come out from distributor "E".

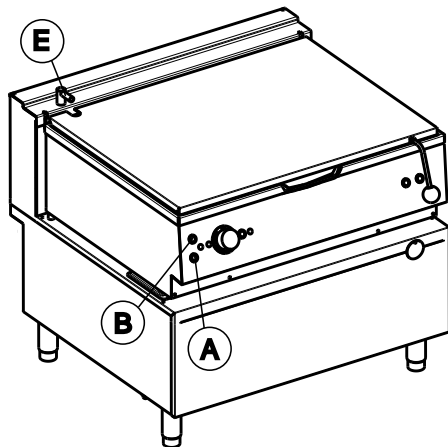

### F.2 Gas models – Use

The burner ignition knob "V" (on front panel) has 3 positions:

0	Off
90°C - 300°C	Temperature
	Power regulator

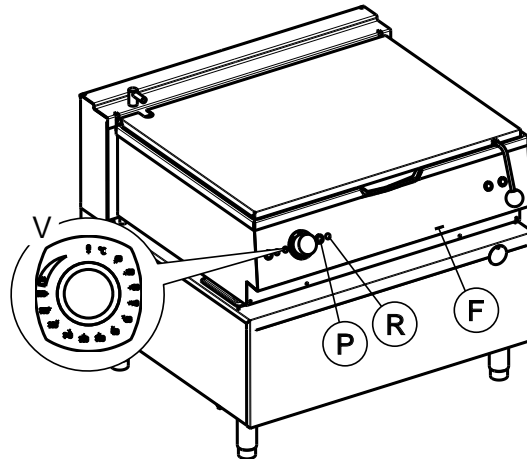

#### F.2.1 Switching ON

- Turn the knob "V" clockwise to activate the automatic lighting procedure.
- The lighting system will carry out up to 5 attempts, after which, if the burner is not lit, the machine goes in shutdown status and the red indicator "R" on the control panel lights up.
- Press button "R" on the control panel to reactivate the lighting procedure.  
NB: To check burner lighting, it is possible to look through the hole "F" on the control panel.
- Turn the knob "V" to set the required temperature.
- Turn the knob "V" past the limit of 300°C to adjust the liquid boiling level.



#### IMPORTANT

A safety device prevents lighting of the main burner if the braiser tank is not completely lowered.

#### F.2.2 Switching OFF


- Turn the knob "V" "0" position.

### F.3 Electric Models – Use

The ignition knob "V" (front panel) has 3 positions:

0	Off
90°C - 300°C	Temperature
	Power regulator



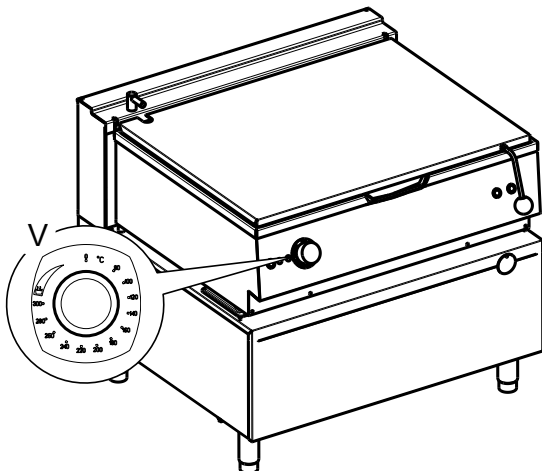

### F.3.1 Switching On

Turn the knob "V":

- clockwise to activate the heating
- clockwise or anticlockwise to set the required temperature.
- past the limit of 300°C to adjust the liquid boiling level.

**NOTE!** A safety device prevents the heating element from switching on if the braiser is not completely lowered.

### F.3.2 Switching Off

- Turn the knob "V" to O - reset position.

### F.3.3 Cooking (valid for gas and electric models)

- Switch the appliance on;
- Do not preheat with the lid closed;
- Place the food to be cooked in the braiser;
- Turn the knob "V" to the required temperature setting; lighting up of green indicator "G" signals that the appliance is on; lighting up of yellow indicator "B" signals the heating phase.
- Turn the knob "V" to the "power regulator" position, depending on the quantity and quality of food to be cooked;


- At the end of cooking, switch off the power by turning the knob "V" to the off position.

### F.3.4 Lifting the tank



#### IMPORTANT

Lift the lid before lifting the tank.

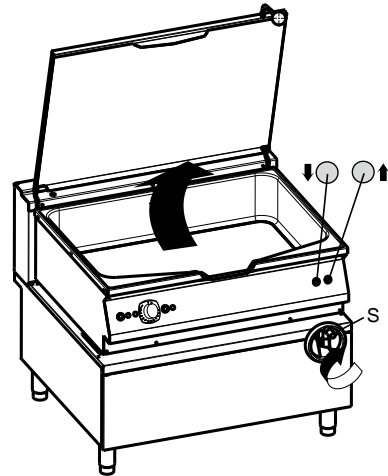

#### Automatic lifting

Use the controls on the right of the control panel for power-operated lifting of the tank. In case of emergency, the tank can be manually lifted or lowered using the special crank-handle provided with each appliance.

#### Manual lifting

Tank lifting and lowering is obtained by means of hand-wheel.



#### CAUTION

When the tank is completely lowered, stop turning the handwheel "S".

## G MACHINE CLEANING AND MAINTENANCE



### WARNING

Refer to "WARNING and Safety Information".

### G.1 Ordinary maintenance

#### G.1.1 Informations for maintenance

Routine maintenance operations can be carried out by non-specialised personnel, carefully following the instructions given below.



#### NOTE!

The manufacturer declines any liability for operations carried out on the machine without following these instructions.

#### G.1.2 Cleaning the appliance and accessories

Before using the appliance, clean all the internal parts and accessories with lukewarm water and neutral soap or products that are over 90% biodegradable (in order to reduce the emission of pollutants into the environment), then rinse and dry thoroughly.



#### IMPORTANT

Do not use solvent-based detergents (e.g. trichloro-ethylene) or abrasive powders for cleaning.

#### G.1.3 External parts

##### SATIN-FINISH STEEL SURFACES (daily)

- Clean all steel surfaces: dirt is easily removed when it has just formed.
- Remove grime, fat and other cooking residuals from steel surfaces when cool using soapy water, with or without detergent, and a cloth or sponge.

Dry the surfaces thoroughly after cleaning.

- In case of encrusted grime, fat or food residuals, go over with a cloth or sponge, wipe in the direction of the satin finish and rinse often:

Rubbing in a circular motion combined with the particles of dirt on the cloth/sponge could spoil the steel's satin finish.

- Metal objects can spoil or damage the steel: damaged surfaces become dirty more easily and are more subject to corrosion.
- Restore the satin finish if necessary.

##### SURFACES BLACKENED BY HEAT (when necessary)

- Exposure to high temperatures can cause the formation of dark marks.

These do not constitute damage and can be removed by following the instructions given in the previous section.



#### G.1.4 Other surfaces

##### SURFACES IN MILD STEEL OR CAST IRON (daily)

- Remove dirt using a damp cloth or, in the event of encrustations, the accessories (optional or supplied) specified in the list;
- After cleaning, switch the appliance on to dry the surface quickly;
- Then protect the surface with a light film of cooking oil.

Use the accessories (optional or supplied) specified in the list to eliminate encrustations or food deposits.

##### HEATED TANKS/CONTAINERS (daily)

- Clean the appliance tanks or containers using boiled water, adding soda (degreasing) if necessary.
- Use the accessories (optional or supplied) specified in the list to eliminate encrustations or food deposits.



### WARNING

With electrical equipment, make sure no water comes into contact with electrical components: water entering can cause short circuiting and dissipation, tripping the appliance's protection devices.

#### G.1.4.1 Scale

##### STEEL SURFACES (when necessary)

- Remove any scale (stains or marks) left by water on steel surfaces using suitable natural detergents (e.g. vinegar) or chemical (e.g. "STRIPAWAY" produced by ECOLAB).

#### G.1.5 Internal parts (every year)



##### IMPORTANT

Operations to be carried out only by specialised personnel.

- Check the condition of the internal parts.
- Remove any deposits of dirt inside the appliance.
- Check and clean the discharge system.
- After the first month of use, it is advisable to clean and regrease the lifting system (screw and nut) to eliminate any work residuals.

Subsequently, at least once a year, or when necessary, lubricate the lifting system.



##### IMPORTANT

In particular conditions (e.g. intensive use of the appliance, salty environment, etc.) the above cleaning should be more frequent.

#### G.1.6 Idle periods

If the appliance is not going to be used for some time, take the following precautions:

- Close the valves or main switches ahead of the appliances;
- Go over all stainless steel surfaces vigorously with a cloth moistened with paraffin oil in order to create a protective film;
- Periodically air the premises;
- Have the appliance checked before using it again;
- For the electric heated models: switch the machine On at the minimum rate of heat for at least 45 minutes; this will allow moisture/humidity accumulated into the heating elements to evaporate without damaging the elements.

#### G.2 Extraordinary maintenance



##### NOTE!

Extraordinary maintenance must be carried out by specialised personnel, who can ask the manufacturer to supply a servicing manual.

##### G.2.1 Brief Troubleshooting guide

In some cases, faults can be eliminated easily and quickly by following a brief troubleshooting guide:

Malfunction	Possible causes:
<b>The temperature cannot be adjusted</b>	<ul style="list-style-type: none"><li>• Damaged thermostat bulb.</li><li>• Faulty thermostat.</li></ul>
If the fault persists after carrying out the above checks, contact the After-Sales Service, remembering to specify: <ul style="list-style-type: none"><li>• the type of fault;</li><li>• the appliance PNC (production number code);</li><li>• the Ser. No. (appliance serial number).</li></ul>	

##### G.2.2 Instructions for replacing components


(to be carried out only by a specialised installer)

###### Gas valve


- Remove the front panel.
- Disconnect the valve from the electrical feed.
- Unscrew the burner pipe.
- Unscrew the valve gas inlet and outlet connections.
- Replace the component, refitting in reverse order.

###### Igniter (CA) and detection (CR) assembly

- To replace the igniter, remove the control panel, loosen the fixing screws and remove the components.

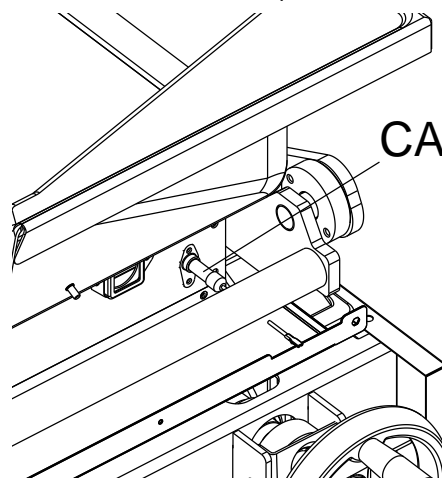


- To replace the detection electrode, remove the left side, loosen the fixing screws and remove the components.

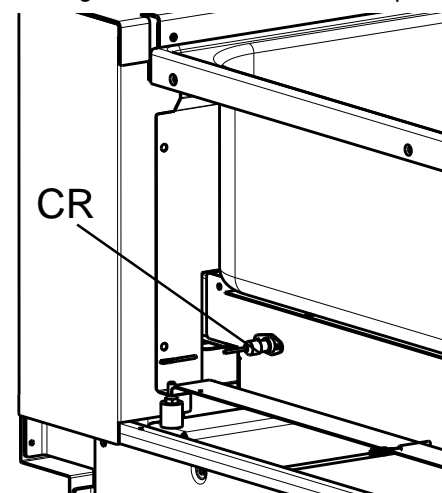


### Main burner

- Remove the front control panel to remove the plate "L";
- Lift the tank and remove the support nut and nozzle;
- Loosen the fixing screws and remove the combustion chamber and burner.

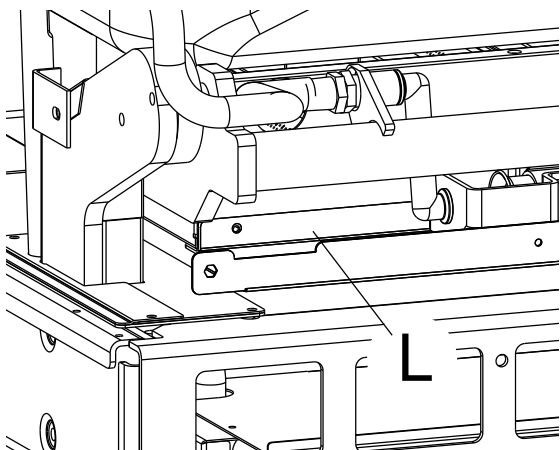

### Thermocouples

- Remove the bottom panel by removing the fixing screws "A" (see the pictures below) to disconnect the two thermocouples from the board.

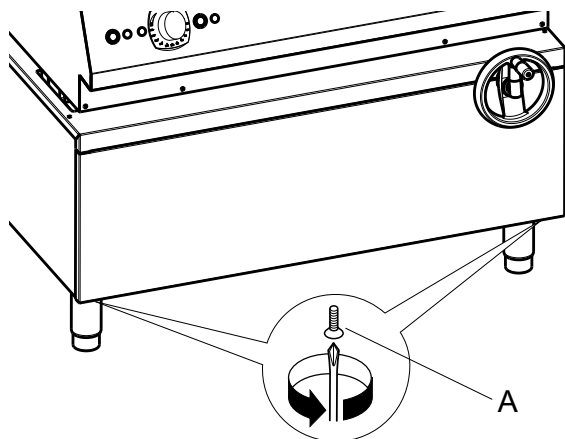

### G.2.4 Maintenance and schedule


All the components requiring maintenance are accessible from the front or the rear panel of the appliance.

#### Maintenance frequency

- Machine maintenance, checking and overhaul operations must only be carried out by a specialised Technician or the Customer Care Service, provided with adequate personal protection equipment (safety shoes and gloves), tools and ancillary means.
- Work on the electrical equipment must only be carried out by a specialised electrician or the Customer Care Service.
- To ensure constant machine efficiency, it is advisable to carry out the checks with the frequency given in the following table:

Maintenance, inspections, checks and cleaning	Frequency	Responsibility
Ordinary cleaning <ul style="list-style-type: none"> <li>• general cleaning of machine and surrounding area.</li> </ul>	Daily	Operator
Mechanical protection devices <ul style="list-style-type: none"> <li>• check their condition and for any deformation, loosening or removed parts.</li> </ul>	Yearly	Service
Control <ul style="list-style-type: none"> <li>• check the mechanical part, for cracks or deformation, tightening of screws: check the readability and condition of words, stickers and symbols and restore if necessary.</li> </ul>	Yearly	Service
Machine structure <ul style="list-style-type: none"> <li>• tightening of main bolts (screws, fixing systems, etc.) of machine.</li> </ul>	Yearly	Service

- Lift the tank "V".
- Undo the fixing screws of the box "S".
- Remove the box to access the thermocouple.

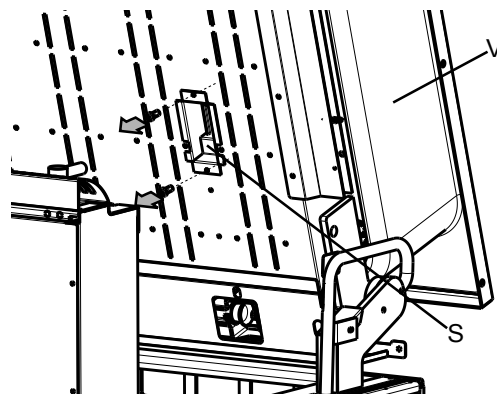

### Power regulator and work thermostat

- Remove the control panel and replace the component.

### Safety thermostat

- Remove the control panel and the front panel and replace the thermostat.

Remove the tank front panel to access the thermostat bulb. Take care with the capillary tube and bulb, which must be positioned in the special seats.

### G.2.3 Maintenance intervals

The inspection and maintenance intervals depend on the actual machine operation conditions and ambient conditions (presence of dust, damp, etc.), therefore precise time intervals cannot be given.

In any case, to minimise interruptions of the service, careful and periodical machine maintenance is advisable.

**It is advisable to stipulate a preventive and scheduled maintenance contract with the Customer Care service.**

Maintenance, inspections, checks and cleaning	Frequency	Responsibility
<ul style="list-style-type: none"> <li>Safety signs check the readability and condition of safety signs.</li> </ul>	Yearly	Service
<ul style="list-style-type: none"> <li>Electrical control panel check the electrical components installed inside the electrical control panel. Check the wiring between the electrical panel and machine parts.</li> </ul>	Yearly	Service
<ul style="list-style-type: none"> <li>Electrical connection cable and plug check the connection cable (replace if necessary) and plug.</li> </ul>	Yearly	Service
<ul style="list-style-type: none"> <li>Extraordinary machine maintenance check all gas components (if present).</li> </ul>	Yearly	Service
General machine overhaul <ul style="list-style-type: none"> <li>check all components, electrical equipment, corrosion, pipes...</li> </ul>	Every 10 years <sup>1</sup>	Service

1. the machine is designed and built for a duration of about 10 years. After this period of time (from commissioning) the machine must undergo a general inspection and overhaul. Some examples of checks to be carried out are given below.

- Check for any oxidised electrical components or parts; if necessary, replace them and restore the initial conditions;
- Check the structure and welded joints in particular;
- Check and replace bolts and/or screws, also checking for any loose components;
- Check the electrical and electronic system;
- Check the functionality of safety devices;
- Check the general condition of protection devices and guards.



**NOTE!**

It is advisable to stipulate a preventive and scheduled maintenance contract with the Customer Care Service.

### Disassembly

- All scrapping operations must occur with the machine stopped and cold and the electrical power supply disconnected.
- Work on the electrical equipment must only be carried out by a qualified electrician, with the power supply disconnected.
- To carry out these operations it is necessary to use: overalls, safety shoes and gloves.
- During disassembly and handling of the various parts, the minimum height from the floor must be maintained.

### G.2.5 Maintenance contacts (only for Australia)

**For service and spare parts, please contact:**

- Electrolux - Tom Stoddart Pty Ltd — 39 Forest Way, Karawatha QLD 4117 — call 1-300-307-289

- Zanussi - JL Lennard Pty Ltd — 42 Giffard Street, Silverwater NSW 2128 — call 1-800-777-440
- Diamond - Semak Food Service Equipment — 18, 87-91 Hallam South Road, Hallam VIC 3803 — call 03 9796 4583

---

## H MACHINE DISPOSAL

---



### **WARNING**

Refer to “*WARNING and Safety Information*”

#### **H.1 Waste storage**

At the end of the product's life-cycle, make sure it is not dispersed in the environment. The doors must be removed before scrapping the appliance.

SPECIAL waste materials can be stored temporarily while awaiting treatment for disposal and/or permanent storage. In any case, the current environmental protection laws in the user's country must be observed.

#### **H.2 Procedure regarding appliance dismantling macro operations**

Before disposing of the machine, make sure to carefully check its physical condition, and in particular any parts of the structure that can give or break during scrapping.

The machine's parts must be disposed of in a differentiated way, according to their different characteristics (e. g. metals, oils, greases, plastic, rubber, etc.).

Different regulations are in force in the various countries, therefore comply with the provisions of the laws and competent bodies in the country where scrapping takes place.

In general, the appliance must be taken to a specialised collection/ scrapping centre.

Dismantle the appliance, grouping the components according to their chemical characteristics, remembering that the compressor contains lubricant oil and refrigerant fluid which can be recycled, and that the refrigerator components are special waste assimilable with urban waste.



The symbol on the product indicates that this product should not be treated as domestic waste, but must be correctly disposed of in order to prevent any negative consequences for the environment and human health. For further information on the recycling of this product, contact the local dealer or agent, the Customer Care service or the local body responsible for waste disposal.



#### **NOTE!**

When scrapping the machine, any marking, this manual and other documents concerning the appliance must be destroyed.

---

## I ENCLOSED DOCUMENTS

---

- Set of test and inspection documents.
- Wiring diagram.
- Installation diagram.



